



18375 Bandilier Circle, Fountain Valley, CA, 92708 Tel: 714 965-7828 Fax: 714 965-7829

**Radflo Suspension Technology  
Install Instructions  
KDSS Calibration  
2007+ Toyota LandCruiser KDSS Equipped**

**Note:**

**Radflo Suspension Technology recommends that all products are installed by trained professionals.**

**Tools required:**


- 10, 12,13,14,17,19 mm wrenches and socket set
- Torque wrench




18375 Bandilier Circle, Fountain Valley, CA, 92708 Tel: 714 965-7828 Fax: 714 965-7829

## Instructions

1. Park vehicle on level surface.
2. Remove stabilizer control valve protector cover, located on frame rail by the drive door.

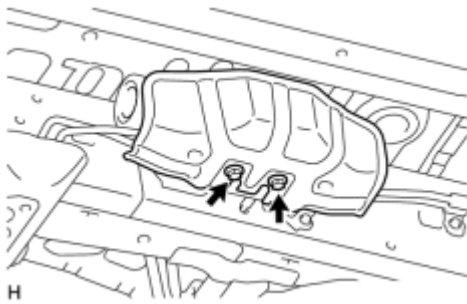

3. Loosen the upper and lower chamber shutter valves on the accumulator. **Do not loosen more than the top of the bolt protrudes 12mm (1/2") from the surface of the block. DO NOT REMOVE THE SHUTTER VALVES.**

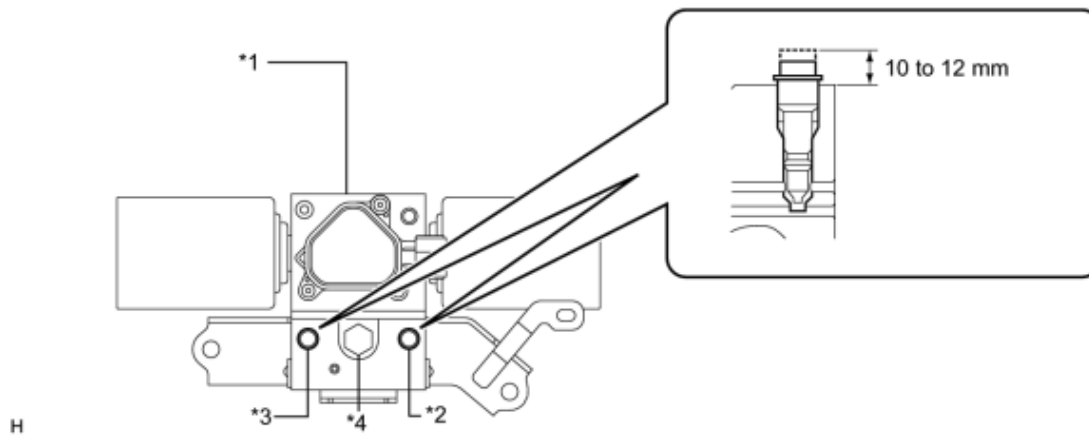

4. Bounce the vehicle till the left and right sides are level.
5. Torque the shutter valves shut **80in/ft or 6.5lb/ft.**
6. Reinstall the protective cover, torque the bolts **21ft/lb.**

\*- Products for off road use only.

**For technical support please contact Radflo Suspension Technology directly at (714) 965-7828 Monday - Friday 8:00 am - 5:00 pm Pacific time. Thank you for your purchase of Radflo Suspension Technology products.**